



LED COLOUR

- 27 2700K
- 30 3000K
- 40 4000K

BEAM ANGLE

- 20 20°
- 40 40°
- 55 55°

FINISH

- MW Matt White
- MB Matt Black

INCLUDED DRIVER

- FO Fixed Output
- LT Leading & Trailing Edge
- 10 1-10V Dimming
- DL DALI Dimming

PRODUCT CODE

LT-Down1-1/15 / / / /

15W	Colour Temp (K)	2700	3000	4000
	Luminous Flux @ 55° (lm)	970	1040	1120


APPLICATIONS

Designed to function as an accent light for numerous and varied applications such as retail displays, bars, shopping centres, public buildings, office and residential.


DESCRIPTION

The LT-Down-1/15 uses the latest Bridgelux COB LEDs to provide a strong but evenly distributed beam of light and features an inner baffle to reduce glare.


This luminaire is constructed from die-cast aluminium with a white or black matt finish and is manufactured complete with plug-and-play cable for easy installation.

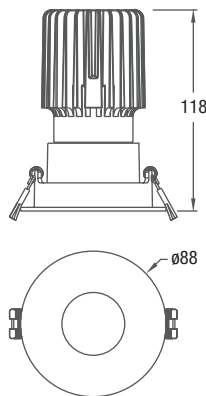

Cut out ø75mm

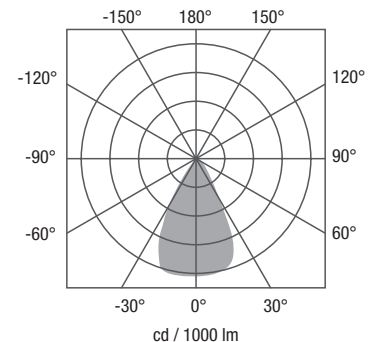

(Curve shown for 3000K with 55° beam angle)

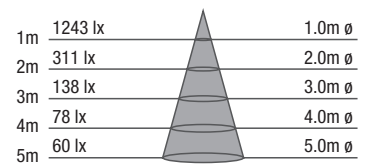

FEATURES

- IP20
- Clean and neat outlooking design
- Uses Bridgelux COB LED - low maintenance cost
- Dedicated thermal management guarantees LED lifetime @ 50,000 hours
- No UV or IR in the light beam
- Compatible with fixed output, leading and trailing edge dimming, and 1-10V dimming systems

Parameter	Specification		
Light Source	Bridgelux COB (Vero 10)		
Power Consumption (W)	15		
LED Current (mA)	DC 450		
Operating Voltage (V)	AC 100-240V 50/60Hz		
Colour Temperature (K)	2700	3000	4000
Luminous Flux @ 20° (lm)	975	1035	1030
Luminous Flux @ 40° (lm)	960	1010	1040
Luminous Flux @ 55° (lm)	970	1040	1120
CRI (Ra)	> 80		
Lifetime (Hrs)	50,000		
Ingress Protection (IP)	20		
Driver Options	Fixed Output, Leading & Trailing Edge Dimming, 1-10V Dimming, DALI Dimming		